

PURE

WOOD - PRODUCT DATASHEET 2023




TECHNICAL DATA (EN 13489)		13 mm	14 mm
Reaction to fire	EN 14342 Table 1 (when applicable) / EN 13501	Dfl-s1	
Emission of formaldehyde	EN 14342	E1	
Brinell hardness (average value)	(BHN) EN1534	Ash	4,0
Beech		3,8	
Oak		3,7	
Walnut		3,2	
Birch		2,6	
Taber Abraser/Lacquer's wear resistance		EN 13696	Proteco Lacquer
Proteco Natura	3500		
<i>These typical values are not applicable for stained, brushed or hardwax oiled products.</i>			
Reduction of sound weighted index ΔL_W in dB with 2 mm Tarkofoam/flex II	EN ISO 10140-3 / EN ISO 717-2	≥17	
Thermal insulation value (RT m ² K/W) board only	EN ISO 10456:2007	0,101	
with rag felt		0,121	
with 2 mm Tarkofoam/flex II		0,141	
Thermal conductivity (W/m K)	EN 12664 / EN 14342:2013	0,104	0,11
Construction: softwood veneer and lamella core		3-layer	

INSTALLATION	
Installation method	2-lock for floating or glue down
Installation instruction	Download from www.tarkett.com Contact your supplier for more details
Underfloor heating compatible	Yes (except beech)
Maximum floor surface temperature 27°C with self-regulating underfloor heating system	
Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m ²	

RECOMMENDED ACCESSORIES	
Installation	Tarkofoam II / Tarkoflex II Installation kit
Aesthetics	Skirting Transition moulding Pipe covers
Care & Maintenance	Tarkoclean Refresher (for lacquered floors)
See more alternatives and the complete range of accessories @ www.tarkett.com	

MAINTENANCE
These Tarkett wooden floors have a Proteco surface treatment and therefore a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details. Please always refer to maintenance guidance available on websites.
See maintenance instructions @ www.tarkett.com

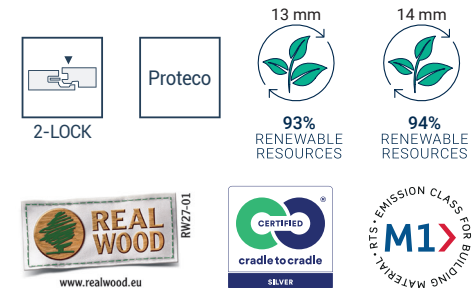

PURE

WOOD - PRODUCT DATASHEET 2023

DESIGN

The authentic design of Mother Nature is left untouched in this collection in order to preserve and enhance the unique character of each board and to create floors with an everlasting style.


PRODUCT DATA	Material code	Dimensions LxWxH (mm)	Pattern	Surface treatment	Surface effect	Bevel (2 side)	Character	Latin name	DoP no.	Wear layer thk (mm)	Board/ pack	m2/ pack	m2/ pallet	Net weight/ m2 (kg)
Pure Birch TreS	8540002	2 281 x 194 x 14	3-strip	Protoco Lacquer	-	-	Lively	1	0020-0106	3,5	6	2,66	93,10	7,6
Pure Ash Nature TreS	7969008	2 281 x 194 x 13	3-strip	Protoco Natura	-	-	Lively	2	0020-0104	2,5	6	2,66	106,4	7,3
Pure Beech Nature TreS	7930003	2 281 x 194 x 14	3-strip	Protoco Lacquer	-	-	Calm	3	0020-0106	3,5	6	2,66	93,10	7,9
Pure Oak Nature Plank	7876070	2 200 x 162 x 14	1-strip	Protoco Natura	-	Minibevel	Calm	4	0190-0105	3,5	6	2,14	77,04	7,9
	7876069	2 000 x 162 x 14	1-strip	Protoco Natura	-	Minibevel	Calm	4	0190-0105	3,5	6	1,94	69,84	7,9
	7878002	2 200 x 162 x 13	1-strip	Protoco Natura	-	Minibevel	Calm	4	0190-0103	2,5	6	2,14	77,04	7,3
	7878001	2 000 x 162 x 13	1-strip	Protoco Natura	-	Minibevel	Calm	4	0190-0103	2,5	6	1,94	69,84	7,3
Pure Oak Nature MidiPlank	41016004	1 850 x 134 x 13	1-strip	Protoco Natura	-	Minibevel	Calm	4	0190-0103	2,5	8	1,98	55,44	7,3

Due to the nature of the material this table shows typical values.

1: Betula Pendula, 2: Fraxinus Angustifolia, 3: Fagus Sylvatica, 4: Quercus Robur & Quercus Petraea



Pure Birch TreS



Pure Ash Nature TreS



Pure Beech Nature TreS



Pure Oak Nature Plank



Pure Oak Nature MidiPlank

The pictures only present the colour of the floor. For more details regarding grading and variations see the Grading Book or www.tarkett.com. Tarkett's international range of floors comprises many different products. Some of these may not be for sale in your country. Although every care has been taken to reproduce images that reflect the finished product, the quality of monitor and printer and the nature of wood results in variations in the color and structure of individual planks. When sanding a wooden floor the appearance will change in colour, texture and surface effects.

For further and latest information please visit www.tarkett.com

PURE

WOOD - PRODUCT DATASHEET 2023

PRODUCT DATA	Material code	Dimensions LxWxH (mm)	Pattern	Surface treatment	Surface effect	Bevel (2 side)	Character	Latin name	DoP no.	Wear layer thk (mm)	Board/ pack	m2/ pack	m2/ pallet	Net weight/ m2 (kg)
Pure Oak Nature DuoPlank	8727002	2 281 x 194 x 13	2-strip	Proteco Natura	-	-	Calm	4	0020-0104	2,5	6	2,66	106,4	7,3
Pure Oak Nature TreS	8723923	2 281 x 194 x 13	3-strip	Proteco Lacquer	-	-	Calm	4	0020-0104	2,5	6	2,66	106,4	7,3
	8723924	2 281 x 194 x 13	3-strip	Proteco Natura	-	-	Calm	4	0020-0104	2,5	6	2,66	106,4	7,3
Pure Oak Rustic Plank XT	7879004	2 200 x 190 x 13	1-strip	Proteco Natura	Brushed	Minibevel	Lively	4	0190-0103	2,5	6	2,51	87,85	7,3
	7879003	2 000 x 190 x 13	1-strip	Proteco Natura	Brushed	Minibevel	Lively	4	0190-0103	2,5	6	2,28	79,80	7,3
Pure Oak Rustic Plank	7876957	2 200 x 162 x 14	1-strip	Proteco Natura	Brushed	Minibevel	Lively	4	0190-0105	3,5	6	2,14	77,04	7,9
	7876958	2 000 x 162 x 14	1-strip	Proteco Natura	Brushed	Minibevel	Lively	4	0190-0105	3,5	6	1,94	69,84	7,9
Pure Oak Rustic DuoPlank	8727003	2 281 x 194 x 13	2-strip	Proteco Natura	Brushed	-	Lively	4	0020-0104	2,5	6	2,66	106,4	7,3
Pure Oak Rustic TreS	8723021	2 281 x 194 x 13	3-strip	Proteco Natura	-	-	Lively	4	0190-0103	2,5	6	2,66	106,4	7,3
Pure Walnut TreS	8577008	2 281 x 194 x 14	3-strip	Proteco Natura	-	-	Expressive	5	0020-0106	3,5	6	2,66	93,10	7,6

Due to the nature of the material this table shows typical values.

4: Quercus Robur & Quercus Petraea, 5: Juglans Nigra




Pure Oak Nature DuoPlank



Pure Oak Nature TreS



Pure Oak Rustic Plank XT



Pure Oak Rustic Plank



Pure Oak Rustic DuoPlank



Pure Oak Rustic TreS



Pure Walnut TreS

The pictures only present the colour of the floor. For more details regarding grading and variations see the Grading Book or www.tarkett.com. Tarkett's international range of floors comprises many different products. Some of these may not be for sale in your country. Although every care has been taken to reproduce images that reflect the finished product, the quality of monitor and printer and the nature of wood results in variations in the color and structure of individual planks. When sanding a wooden floor the appearance will change in colour, texture and surface effects.

For further and latest information please visit www.tarkett.com

PURE SVANEN

WOOD - PRODUCT DATASHEET 2023

FOR AREAS WITH NORMAL TRAFFIC LIKE DOMESTIC ENVIRONMENT, HOTEL ROOMS AND SIMILAR.



TECHNICAL DATA (EN 13489)		14 mm
Reaction to fire	EN 14342 Table 1	Dfl-s1
Emission of formaldehyde	EN 14342	E1
Brinell hardness (average value) Oak	(BHN) EN1534	3,7
Reduction of sound weighted index ΔL_w in dB with 2 mm Tarkofoam/flex II	EN ISO 10140-3 / EN ISO 717-2	≥ 17
Thermal insulation value (RT m ² K/W) board only with rag felt with 2 mm Tarkofoam/flex II	EN ISO 10456:2007	0,101 0,121 0,141
Thermal conductivity (W/m K)	EN 12664 / EN 14342:2013	0,11
Construction: softwood veneer and lamella core		3-layer

Hanaskog 2022.11

INSTALLATION	
Installation method	2-lock for floating or glue down
Installation instruction	Download from www.tarkett.com Contact your supplier for more details
Underfloor heating compatible Maximum floor surface temperature 27°C with self-regulating under-floor heat system	Yes
Start & Stop: Shorter lengths of planks included in approx. 1 pack per 20 m ²	

RECOMMENDED ACCESSORIES	
Installation	Tarkofoam II / Tarkoflex II Installation kit
Aesthetics	Skirting Transition moulding Pipe covers
Care & Maintenance	Tarkoclean Refresher
See more alternatives and the complete range of accessories @ www.tarkett.com	

MAINTENANCE
Tarkett wooden floors have a strong protection against normal wear, abrasion, scratches and stains. Some floors will require more frequent maintenance for increased life span. Generally these products are light coloured floors and hardwax oiled floors, particularly with brushed surface and/or highlighted details, such as saw marks. Please always refer to maintenance guidance available on websites.
See maintenance instructions @ www.tarkett.com



2-LOCK



Matt
Lacquer



94%
RENEWABLE
RESOURCES



www.realwood.eu



 **Tarkett**

PURE SVANEN

WOOD - PRODUCT DATASHEET 2023

PRODUCT DATA	Material code	Dimensions LxWxH (mm)	Pattern	Surface treatment	Surface effect	Bevel (2 side)	Character	Latin name	DoP no.	Wear layer thk (mm)	Board/ pack	m2/ pack	m2/ pallet	Net weight/ m2 (kg)
Pure Oak Nature TreS NS	7869047	2 281 x 194 x 14	3-strip	Matt Lacquer	-	-	Calm	1	0020-0106	3,5	6	2,66	93,10	7,9
Due to the nature of the material this table shows typical values.														

1: Quercus Robur & Quercus Petraea



The pictures only present the colour of the floor. For more details regarding grading and variations see the Grading Book or www.tarkett.com. Tarkett's international range of floors comprises many different products. Some of these may not be for sale in your country. Although every care has been taken to reproduce images that reflect the finished product, the quality of monitor and printer and the nature of wood results in variations in the color and structure of individual planks. When sanding a wooden floor the appearance will change in colour, texture and surface effects.

For further and latest information please visit www.tarkett.com